

# **ROBK2TD-B LED Flex Strip** Great solution for corner & contour decoration



### **ADVANTAGES**

- 3 years warranty\*
- Long life & low luminance attenuation 2835 SMD LED
- Curving diameter as small as 50mm, perfect for contour decoration
- Available in white & red
- CE, RoHS compliant
- \* 3 years or 13,000 hours, whichever comes first
- \* Working within operating temperature

# **PRODUCT OPTIONS**

#### **APPLICATION LOCATIONS**

• Indoor environment such as KTV, hotel lobby, shopping mall, museum and etc.

### INSTALLATION

- Max. application length 5m
- Easy installation with 3M self-adhesive tape
- Can cut every single unit length

		Colour									
	LED	Temperature (K)	Beam	Luminous Flux		Luminous Efficiency	Working Voltage	Working Current	Working Current	Power	Power
P/N	Colour	Wavelength (nm)	Angle (°)	(lm/m)	CRI	(Im/W)	(V DC)	(mA/m)	(mA/5m)	(W/m)	(W/5m)
ROBK2TD-B	Natural white	6000	115	1550	≥70	77	24	830	4160	20	100
	Daylight white	4500		1550	≥70	77					
	Warm white	3000		1440	≥70	70					
	Red	620 ~ 625		400	-	20					

#### ASTECH (a Division of the Albert Smith Group)

59 Taylor St Bulimba QLD 4171, Ph. 07 3395 9888 Fx. 07 3891 0713

Email: enquires@asgroup.com.au Web: www.albertsmithgroup.com.au



# ROBK2TD-B LED Flex Strip


# Great solution for corner & contour decoration

### OTHERS

			Max App	olication				
			Length					
		Standard	(m)			Operating	Storage	Ingression
	Colour	Length	Single	Double	LED Qty	Temperature	Temperature	Protection
P/N	Options	(m)	End	End	(pcs / m)	(°C)	(°C)	Grading
ROBK2TD-B	White, Red	5	5	N/A	192	-25 ~ +60	-25 ~ +70	IP33

# **PRODUCT PROFILE**

# Unit: mm [in]

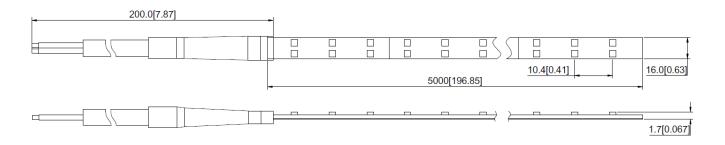

# **ATTENTION**

• This LED flex strip SHALL be installed on metallic surface which provides extra heat sink capacity

#### ASTECH (a Division of the Albert Smith Group)

59 Taylor St Bulimba QLD 4171, Ph. 07 3395 9888 Fx. 07 3891 0713

Email: enquires@asgroup.com.au Web: www.albertsmithgroup.com.au