

RS00C0QC High Bright High CRI LED Flex Strip
Great solution for corner & contour decoration



ADVANTAGES

- 5 years warranty*
- High brightness & high CRI
- Long life 3020 SMD LED
- Curving diameter as small as 50mm, perfect for contour decoration
- UL, CE, RoHS compliant

* 5 years or 22,000 hours, whichever comes first

* Working within operating temperature

APPLICATION LOCATIONS

- Indoor environment such as KTV, hotel lobby, shopping mall, museum and etc.

INSTALLATION

- Max. application length 3m
- Easy installation with 3M self-adhesive tape
- Can cut every single unit length

PRODUCT OPTIONS

P/N	LED Colour	Colour Temperature (K) Wavelength (nm)	Beam Angle (°)	Luminous Flux (lm/m)	CRI	Luminous Efficiency (lm/W)	Working Voltage (V DC)	Working Current (mA/m)	Working Current (mA/3m)	Power (W/m)	Power (W/3m)
RS00C0QC-T	Daylight white	4500	115	2000	≥90	69	24	1200	3270	28.8	78.5
RS00C0QC-T-UL											

ASTECH (a Division of the Albert Smith Group)

59 Taylor St Bulimba QLD 4171, Ph. 07 3395 9888 Fx. 07 3891 0713

Email: enquires@asgroup.com.au Web: www.albertsmithgroup.com.au


ABN. 42345973910

RS00C0QC High Bright High CRI LED Flex Strip
Great solution for corner & contour decoration

OTHERS

P/N	Colour Options	Standard Length (m)	Max Application Length		LED Qty (pcs / m)	Operating Temperature (°C)	Storage Temperature (°C)	Ingression Protection Grading
			Single End	Double End				
R00C0QC-T	Daylight white	3	3	N/A	120	-25 ~ +60	-25 ~ +70	IP33
R00C0QC-T-								

PRODUCT PROFILE

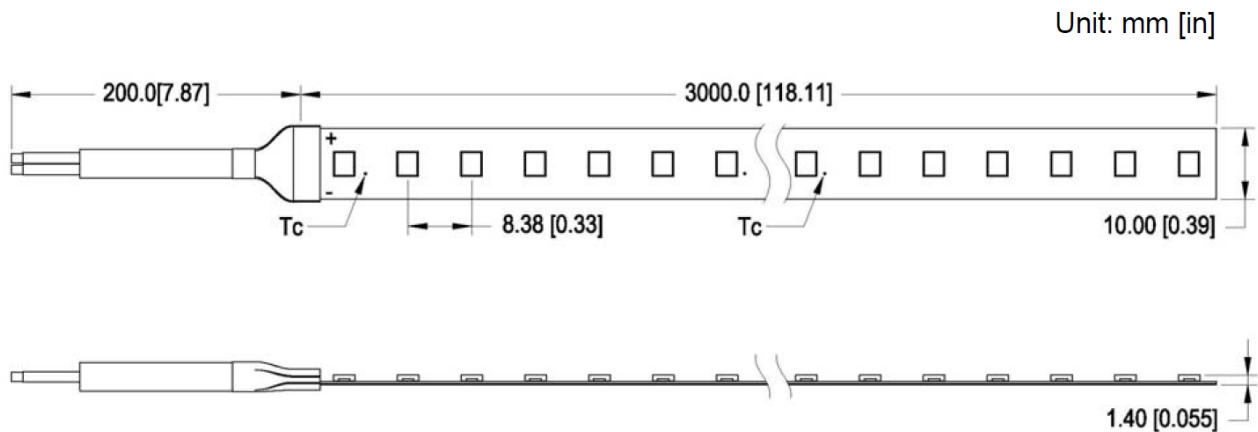

ATTENTION

- This product **MUST** be installed on metallic profile such as AL6063-T5 with surface area of no less than 0.08m² or equivalent
- Monitor temperature at strip's Tc marks (refer to profile drawing) to ensure working within allowable temperature range

ASTECH (a Division of the Albert Smith Group)

59 Taylor St Bulimba QLD 4171, Ph. 07 3395 9888 Fx. 07 3891 0713

Email: enquires@asgroup.com.au Web: www.albertsmithgroup.com.au

ABN. 42345973910